

PROOWOOD

— ORMAN ÜRÜNLERİ —
FOR EXPORT - IMPORT



FSC
www.fsc.org
CQ - COC - 002246

NAVIGA
CERTIFICATION
180 0001:2009

NAVIGA
CERTIFICATION
280 0001:2018

NAVIGA
CERTIFICATION
OHSAS 18001:2007

RAW MATERIALS CATALOG

CONTENT DECORATIVE RAW METERIAL OF DOOR FURNIITURE

EDGE GLUED PANELS

Wood Species:

Spruce or Pine

D3-D4 according to DIN EN 204

Thickness	18-28-45 mm
Width	650-800-1220 mm
Length	Solid 2440-3000 mm
FJ	3500-5000 mm

Surface Finishing:

Sanded (120 grid)

Surface Quality

A/A - A/B - B/B - B/C - C/C

Moisture

%10 ± 2

Maximum Width:



30-40-50 mm

Packaging:

Single shrink wrapped

Label customized on request

User guide

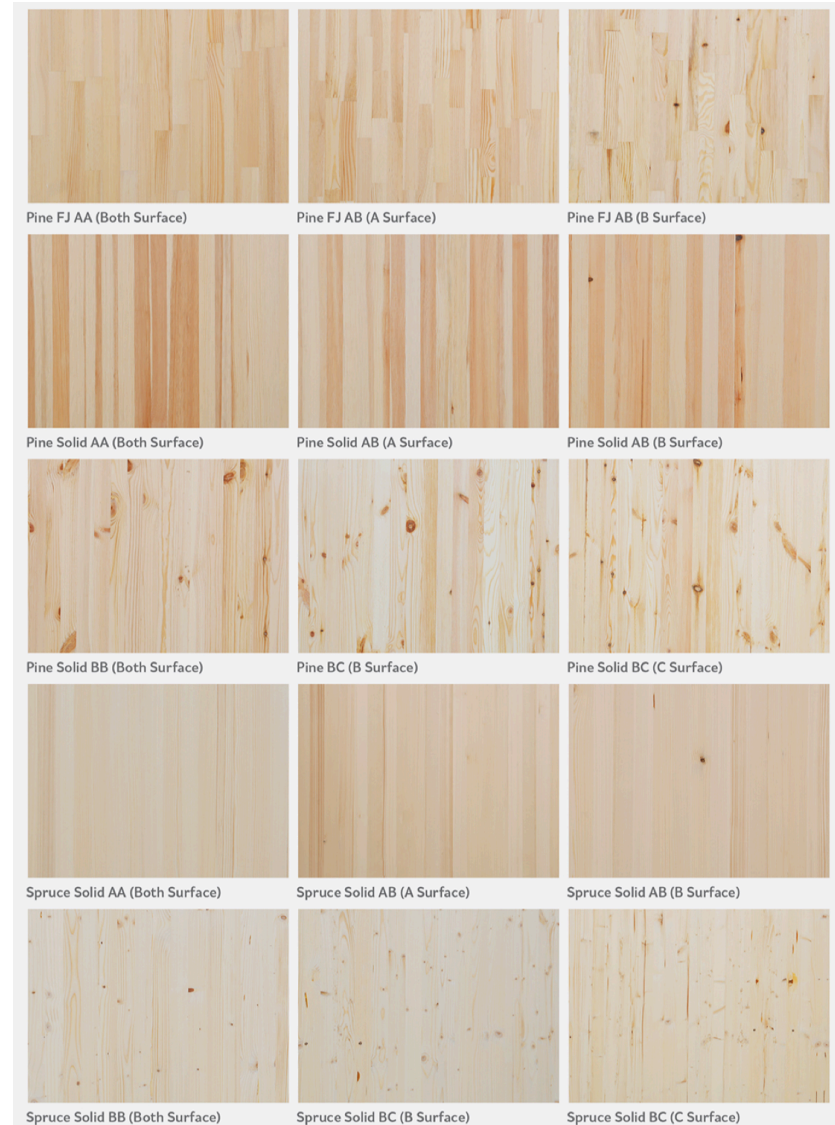

AA Edge Glued Panel

There are no signs on the surface that can be regarded as defects. (Knot, resin, fissure, core etc.)

AB Edge Glued Panel

A Surface: On the surface, very little amount of healthy, bird eyes can be knotted.

B Surface: On the surface there is very little amount of knots and moire wood, the amount of resin can be small.

BB Edge Glued Panel

B Surface: The healthy knots on the surface is very high and there are moire wood, the amount of resin can be small.

BC Edge Glued Panel

B Surface: The healthy knots on the surface is very high and there are moire wood, the amount of resin can be small.

C Surface: In addition to class B on the surface, the amount of black knots, there are core wood, there are resin cuts.



CC Edge Glued Panel

C Surface: In addition to class B on the surface, the amount of black knots, there are core wood, there are resin cuts.

Note: The crusted surface is absent from any edge glued panel class.

DOOR STILE

Door stile is mostly used in American Panel or MDF doors to strengthen the door leaves. Door stile product category includes length-adding stile, solid stile, MDF stile, laminated stile, doorframe stile and doorframes. The door stiles which are made of pinewood or spruce tree are sliced in different sizes. There are lots of reasons behind using pinewood or spruce tree while producing door stiles. High moisture rates of those trees makes them perfect for producing strong door stiles hence strong doors. We are slicing the door stiles in different sizes by your needs in our facilities.

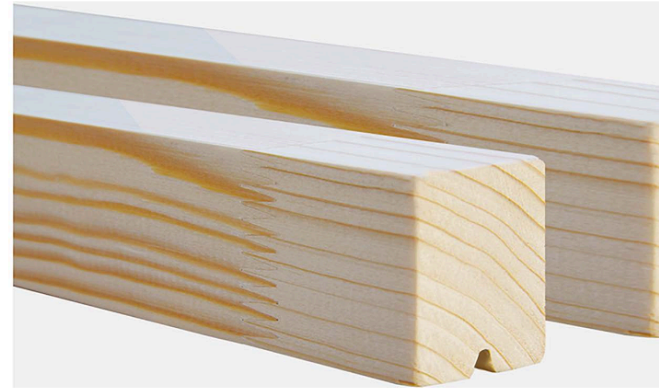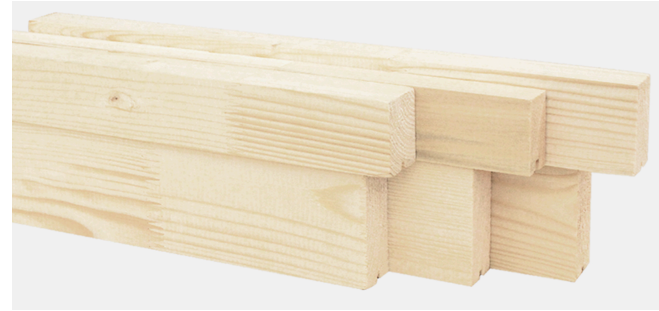

FJ DOOR STILES

Wood Species:

Spruce and Pine

Dimensions:

Thickness : 30-38 mm
Width : 30-50 mm
Length : 2000-2200 m

Finish:

Planed, square edged, chamfered, eased edge

Quality Standard:

In the norm of D3 conformable
to the DIN EN 204 Standard covering

Moisture Content:

%10 ± 2

Packaging:

9 or 12 tied, in pallet, stretched and shrinked

Additional Features:

None knots and none defects.
Finger Joint applied.
4 mm x 4 mm Ventilation Channel
A Grade: None knots and none defects.
B Grade: Small knots and small defects.

TIMBER

wood offers high-quality square-sawn timber produced from pine and spruce woods on modern high-tech mill located in Russia.

We offer sawn timber of various sizes, made of pine and spruce wood species and certified according to international standards. Only legally harvested, high-quality and ecologically pure wood is used for our sawn timber materials.

- Direct access to the main timber and lumber procurement markets.
- Our own worldwide procurement network.
- Our own sawn timber production specialized in Russian (pine and spruce) wood species.
- Cutting capacity of 50.000 solid cubic metres/year.
- Additional cut-to-size capacity of 12.000 solid cubic metres/year.
- Kiln dried capacity of 36.000 cubic metres/year.



TIMBER

Wood Species

Spruce and Pine.

Options

According to changing customer needs, can be produced in desired thickness, width and length.

THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	QUALITY	FINISHED	MOISTURE
20	42	2250 / 2985	I - IV	S4S/ROUGH	KD%10 (+/-2)
20	65	2250 / 2985	I - IV	S4S/ROUGH	KD%10 (+/-2)
20	95	2250 / 2985	I - IV	S4S/ROUGH	KD%10 (+/-2)
30	105	2985	I - IV	S4S/ROUGH	KD%10 (+/-2)
45	105	2985	I - IV	S4S/ROUGH	KD%10 (+/-2)
45	101	2985	I - IV	S4S/ROUGH	KD%10 (+/-2)
45	115	2985	I - IV	S4S/ROUGH	KD%10 (+/-2)

Processing:

Rough, anti-stain protection
Fresh or kiln dried

Log:



Palette based stretch packaging

Moisture Content:

%10 ± 2

Certification:

FSC- CW

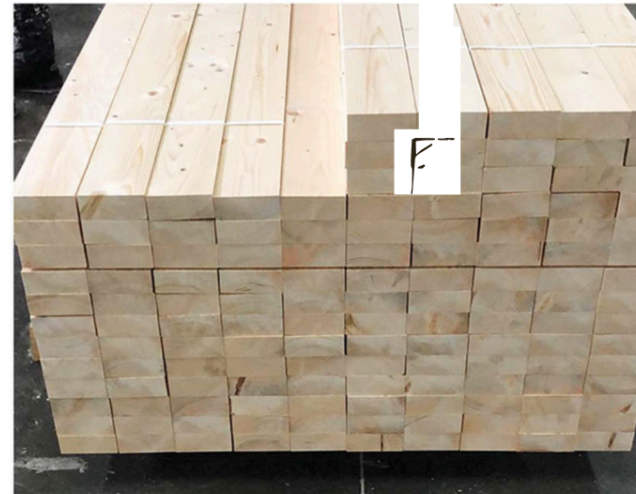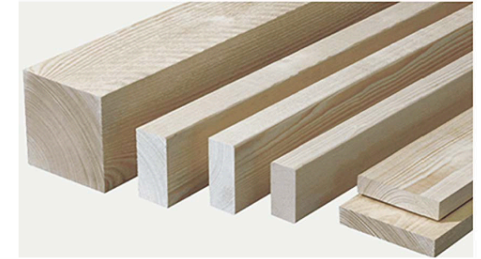

PROOWOOD

ORMAN ÜRÜNLERİ
FOR EXPORT - IMPORT



REACH US



WWW.PROOWOOD.COM



+90 539 552 1799



Kızılarık
mah.Kızılırmak.Cad.H.ço
ban iş merkezi B blok /
no 135/Daire 7 kat 2
Antalya /Muratpasa