



**FLOORING  
CATALOG**

*Bring nature for home*

# PROOWOOD

— ORMAN ÜRÜNLERİ —

FOR EXPORT - IMPORT



## **Content**

- >HDF FLOORING**
- >SKIRTING**
- >FOAM**


# HDF FLOORING

## HDF FLOORING :

Wood particles condensed under high pressure and heat.

AC2-AC3-AC4-AC5 variants are available.  
shows difference according to usage area.

not resistant to water and moisture.  
for use on dry and smooth floors.  
Suitable for underfloor heating system.

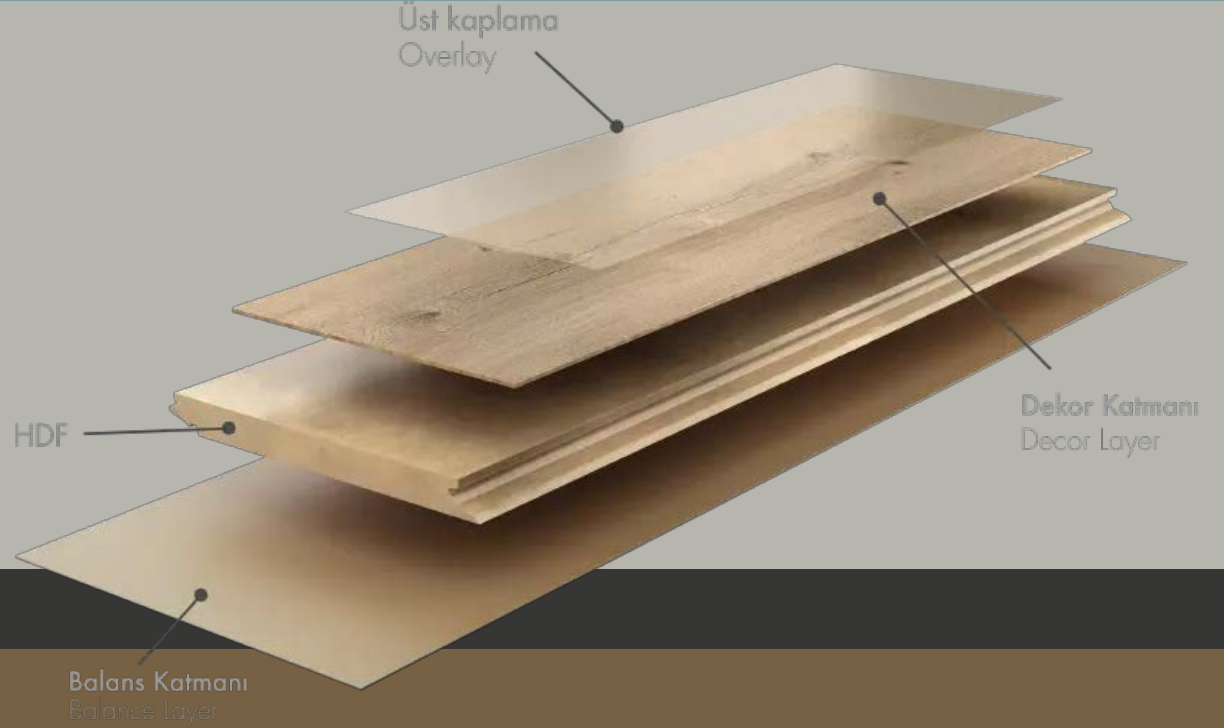

PR-AT-B  
AC3-31

Width:  
193 mm  
Length:  
1200 mm  
Thickness:  
8 mm  
packet:  
2,3160 m<sup>2</sup>

\*%100 ağaç liflerinden oluşan yüksek yoğunluktaki levha tabakasıdır.





PRK101



PRK104



PR-AT-B



PRK102




PRK1110






PRK005

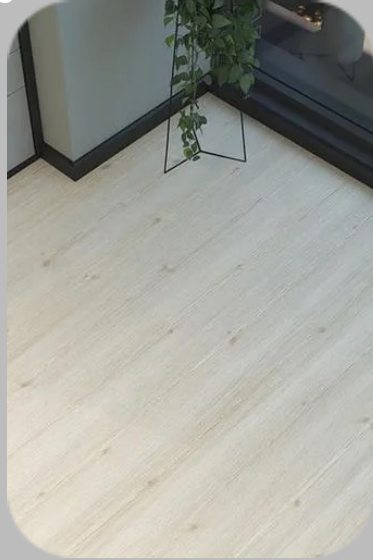

PRK107



PR-AT-B

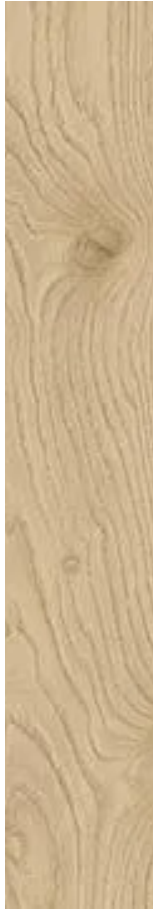

PRK110



PRK105





PRK109




PRK103



PR-AT-B



PRK108

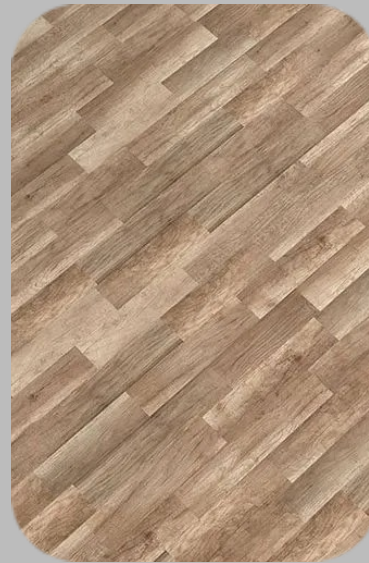

PRK1113



# HDF FLOORING



PR-AT-NT  
AC4-32

Width:  
191 mm  
Length:  
1200 mm  
Thickness:  
8 mm  
packet:  
1,8336 m<sup>2</sup>



PRK400



PRK004



PR-AT-NT



PRK214



PRK002







PRK202



PRK1106



PR-AT-NT



PRK203



PRK1109





PRK006



PRK201



PR-AT-NT



PRK204



PRK213






PRK200



PRK206

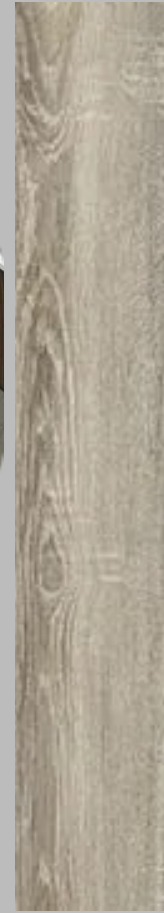

PR-AT-NT



PRK208




PRK205






PRK1115

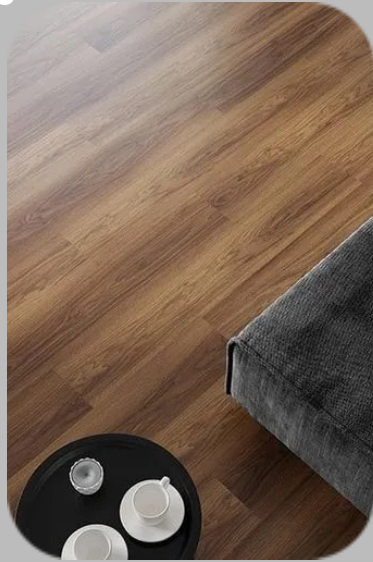


PRK401

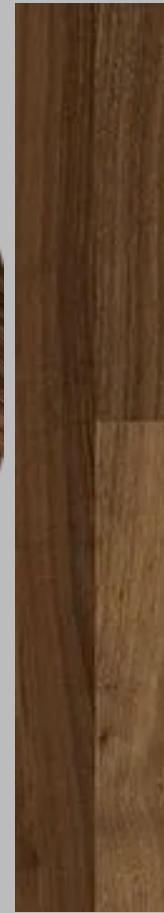


PR-AT-NT



PRK209

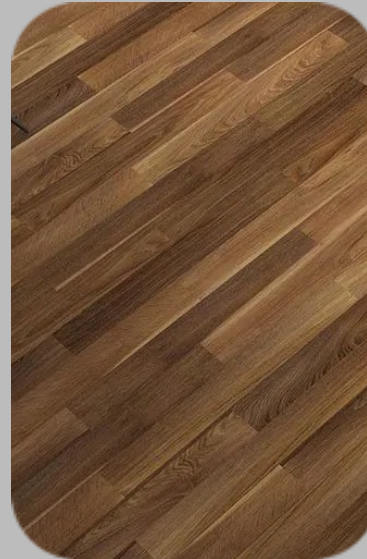

PRK1111

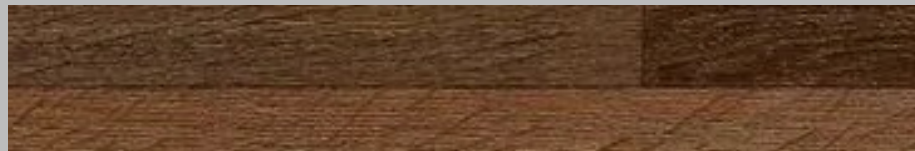



PR-AT-PA  
AC4-32


Width:  
188 mm  
Length:  
1200 mm  
Thickness:  
8 mm  
packet:  
1,8048 m<sup>2</sup>



PRK000

PR-AT-PA

LIKYA  
PRK000

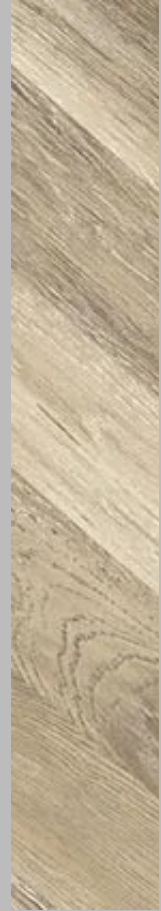

# HDF FLOORING



PR-AT-NE  
AC4-32

Width:  
1931mm  
Length:  
1200 mm  
Thickness:  
8 mm  
packet:  
1,8336 m<sup>2</sup>

**PROOWOOD**  
— ORMAN ÜRÜNLERİ —  
FOR EXPORT - IMPORT



PR-AT-NE

PRK502



PRK503



PRK511



PRK510







PRK201



PRK506



PR-AT-NE



PRK507



PRK505





PRK501




PRK509



PR-AT-NE



PRK508

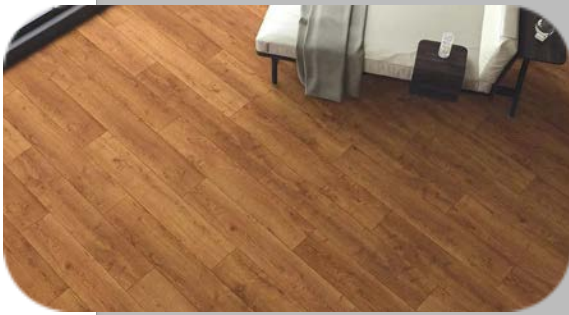

PRK504



# HDF FLOORING

PR-AT-AM  
AC4-32

Width:  
154,5 mm  
Length:  
1380 mm  
Thickness:  
8 mm  
packet:  
2,1942 m<sup>2</sup>





PRK302



PRK303



PR-AT-AM



PRK301




PRK305




PR-AT-AM



PRK304

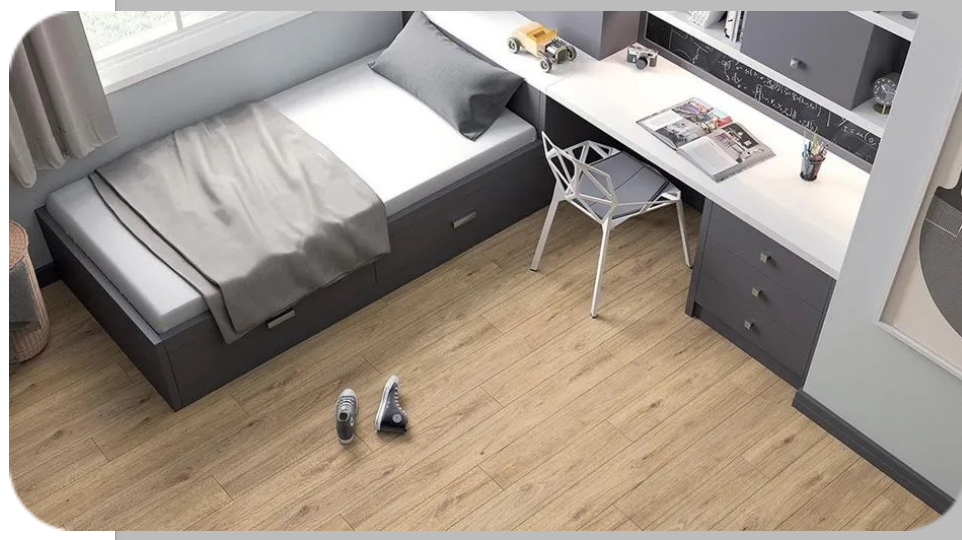

PRK306

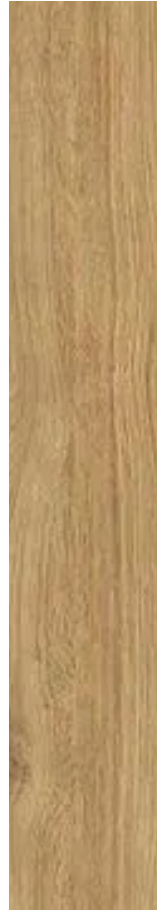

# HD7 FLOORING



Width:  
246 mm  
Length:  
1380 mm  
Thickness:  
8 mm  
packet:  
2,3764 m<sup>2</sup>

PR-AT-AE  
AC4-32



PRK302



PRK303



PR-AT-AE



PRK301




PRK305




PR-AT-AM



PRK304

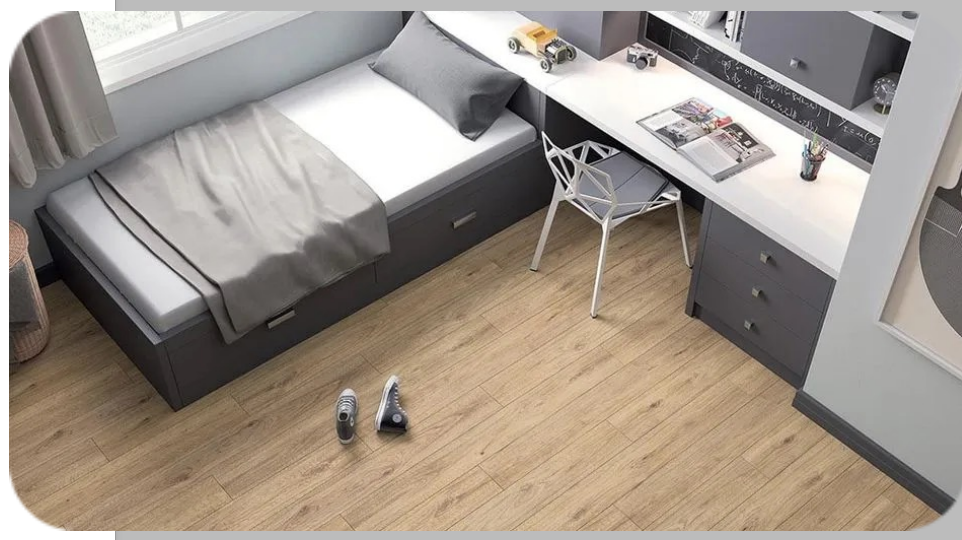

PRK306

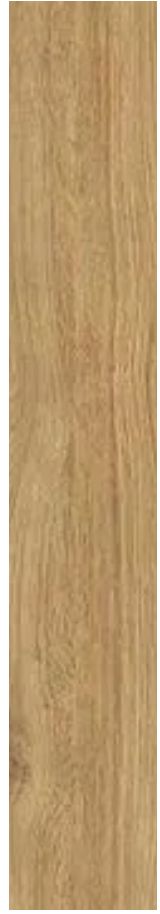



# HDF FLOORING



PR-AT-CO  
AC4-32

Width:  
154,5 mm  
Length:  
1195 mm  
Thickness:  
10mm  
packet:  
1,4770 m<sup>2</sup>



PRK601



PRK600



PR-AT-CO




PRK603



PRK602



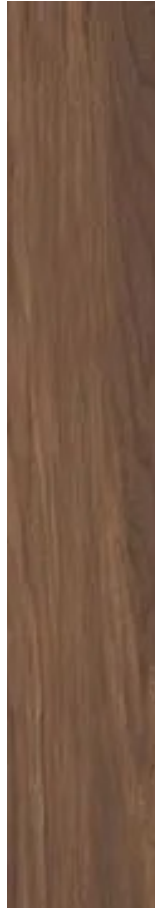

PRK604



PR-AT-CO



PRK605

# HDF FLOORING



3 TYPE OF (PR-AT-ET):

	Width	Length	Thickness
AC4-3	191 mm	1200 mm	8 mm
AC5-33	189 mm	1195 mm	12 mm
AC5-33	154,5 mm	1195 mm	12 mm



PRK904



PRK903

PRK914



PRK907



PRK902



PRK910

PRK912



PRK911



PRK913



PRK908



PR-AT-ET




PRK905



PRK906



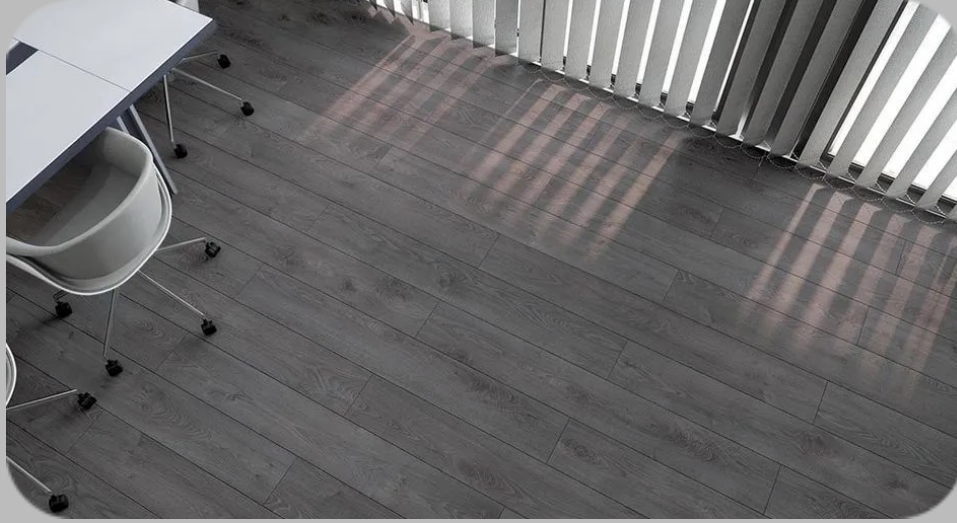

PRK901



PR-AT-ET



PRK909



## HDF FLOORING



PR-AT-BS  
AC4-32

Width:  
193 mm  
Length:  
1380 mm  
Thickness:  
10mm  
packet:  
1,5980 m<sup>2</sup>




PRK705



PRK708



PR-AT-BS

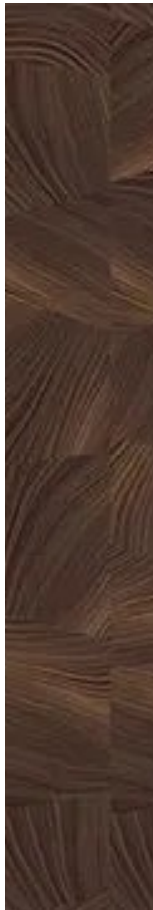

PRK707



Design  
PRK706



# PROOWOOD

— ORMAN ÜRÜNLERİ —  
FOR EXPORT - IMPORT



PR-AT-SK  
AC5-33

Width:  
190 mm  
Length:  
1200 mm  
Thickness:  
12mm  
packet:  
1,3680 m<sup>2</sup>

**HDF FLOORING**


PR-AT-SK

PRK704



PRK701


PRK703

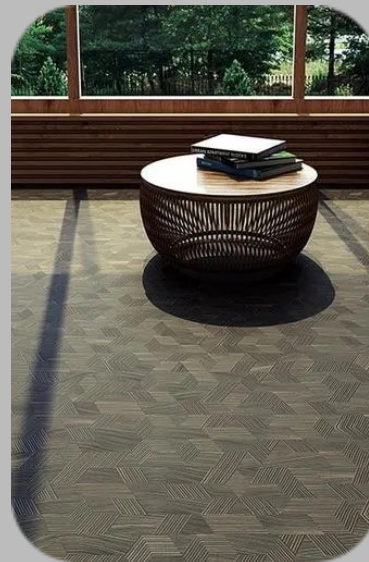


PRK702



# SKIRTING

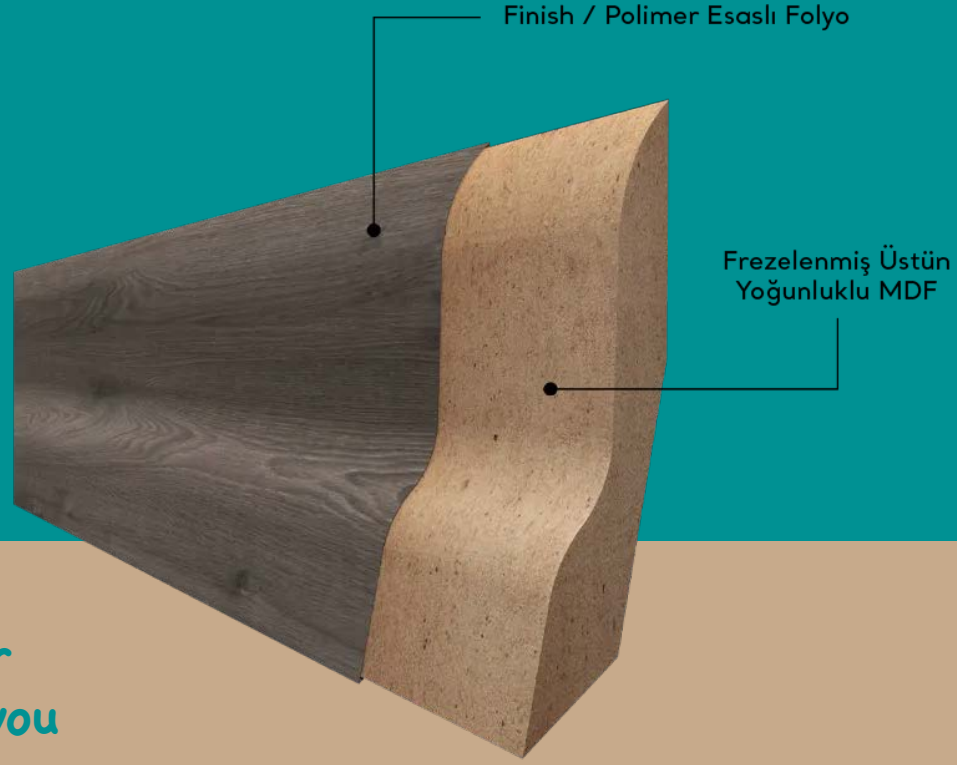

Skirting is compatible with our Floorings. You can get the look you want with a wide range of colours and models. It has different dimensions


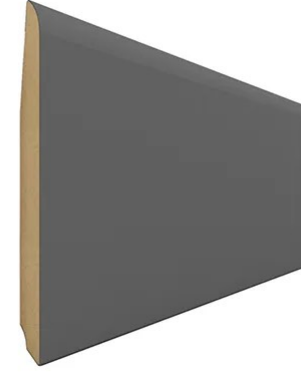


**SPR-5000-E**

9x79x2800


**SPR-6050**

12x22x2800

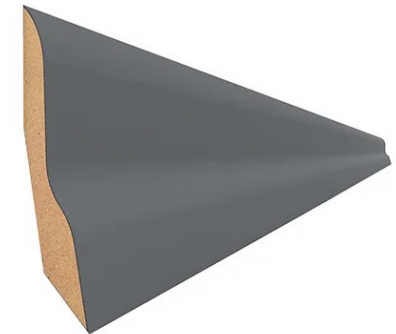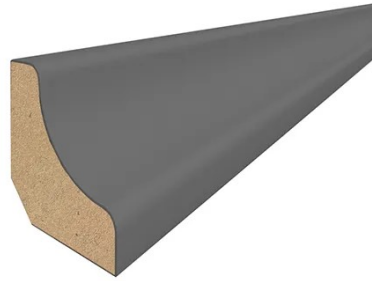

**SPR-5030**

9x60x2800


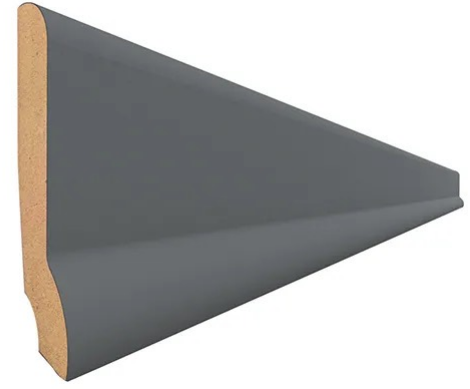


**SPR-5050**

16x80x2800

**SPR-5000**

12x83x2800

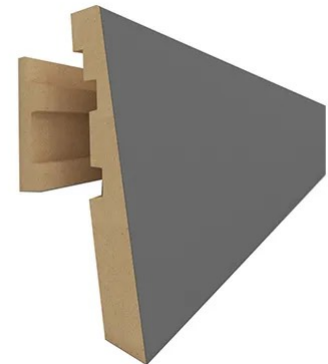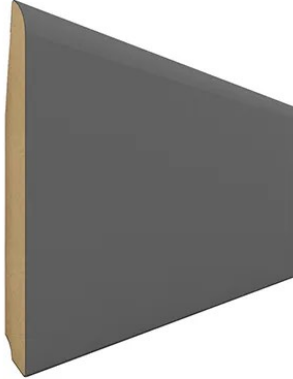

**SPR-6080**

12x83x2800



**SPR-5040**  
18x89x2800

**SPR-5070**  
16x100x2800



**SPR-5020**  
18x100x2800

**SPR-5060**  
29x120x2800







## FOAM

- It extends the life of wooden & laminate floorings
- It stops the heat-cold transfer from and to the wooden floor
- It reduces noise transfer in multi-layered buildings
- It doesn't absorb water
- It is non-poisonous and chemical resistant

THIKNES: 3,4,5mm  
Roll THIKNES :1,1.5,2 mm





REACH US



[WWW.PROOWOOD.COM](http://WWW.PROOWOOD.COM)



+90 539 552 1799



Kızılarık mah.Kızılırmak.Cad.H.çoban iş  
merkezi B blok / no 135/Daire 7 kat 2  
Antalya /Muratpasa

# PROOWOOD

— ORMAN ÜRÜNLERİ —

FOR EXPORT - IMPORT